


MARINE PANEL LAUTEX UP-150

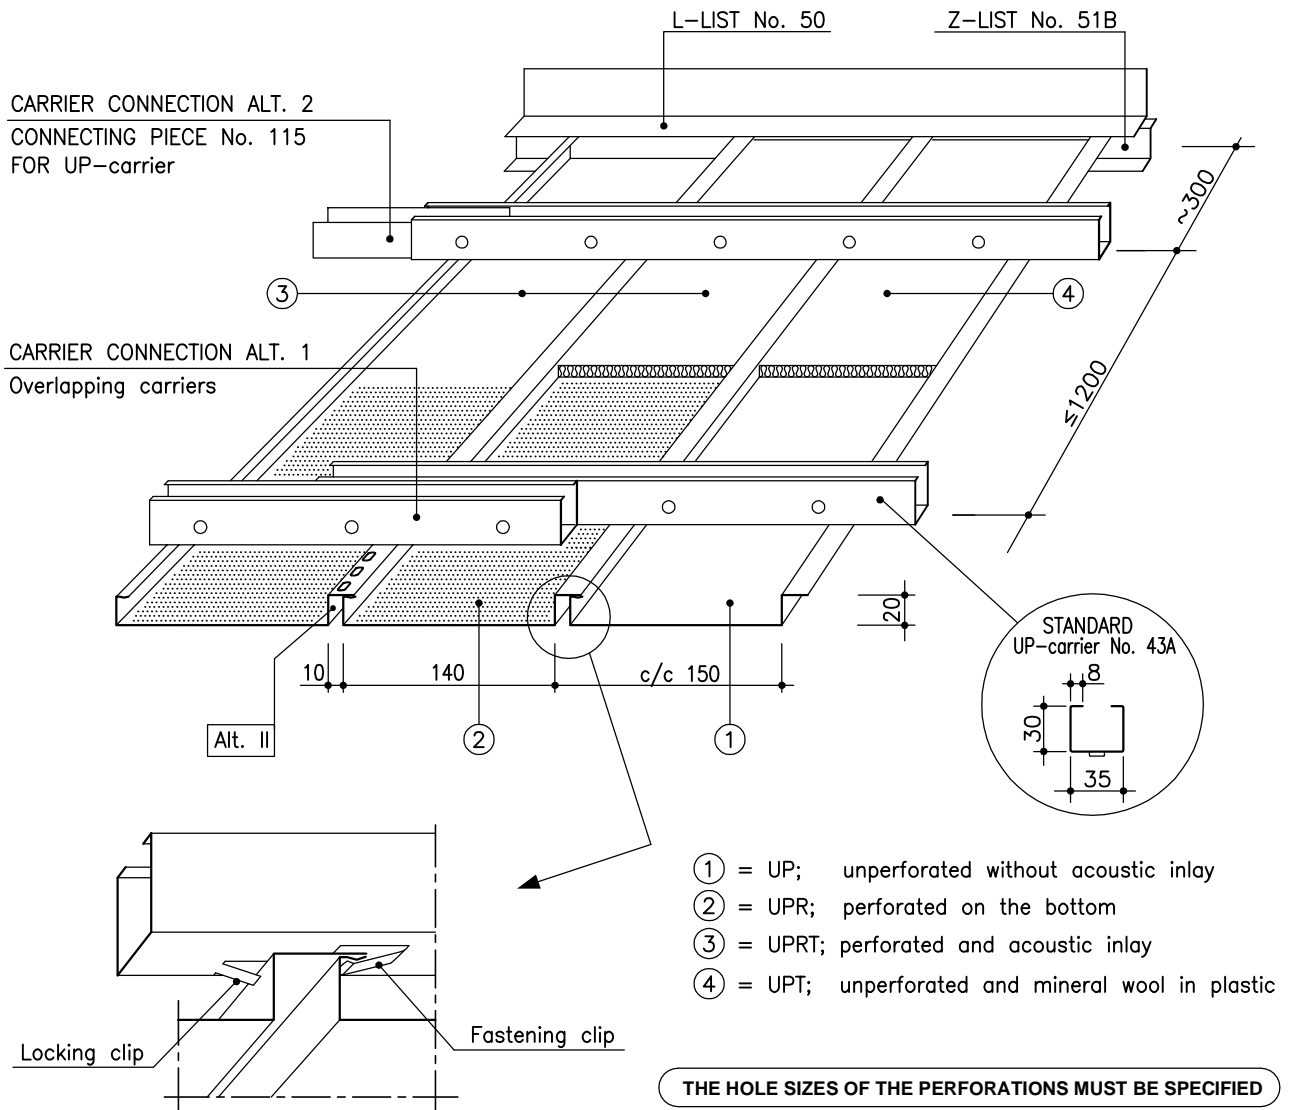

UP-150 PANELS / CLASSIFICATION "C"



Material	0.5 Al	0.7 Al
Width	150 mm	
Height	20 mm	
Length	max 6500 mm	
Perforation	Ø 2.0 mm, other alternatives see "Perforations"	
Inlay	mineral wool in plastic or acoustic felt	
Finish	stove enamelled (or anodized) according to LTX-colour card or any other well-known colour charts	
Ventilation	alt II Ø 5x7 mm, c/c 13 mm = 23 cm ² /m	
Protective film	the surface is provided with a protective film if required	
Service hatch	see page 2	
Loudspeaker panel	see page 2	
Downlight unit	see page 2	
Suspension	see "Suspension systems for panels"	
Edge lists	see "Lists for panels"	
Other special solutions	please contact our technical information department	

Latest information: www.lautex.com


All products are subject to modifications without prior notice 2011

MARINE PANEL LAUTEX UP-150 INSTALLATION DETAILS AND ACCESSORIES

SOLUTION OF PANEL CONNECTION

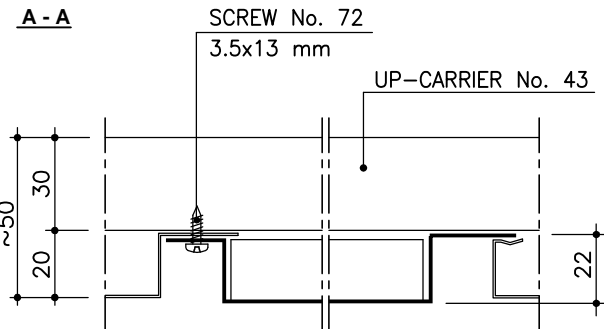


LOUDSPEAKER OR DOWNLIGHT PANEL

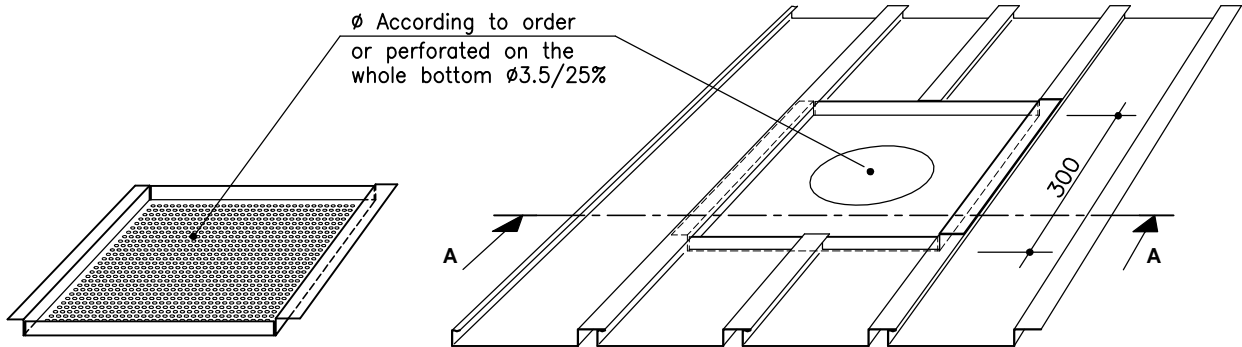

SERVICE HATCH

Length and width =
Opening in the ceiling
Standard size: 300 x 300

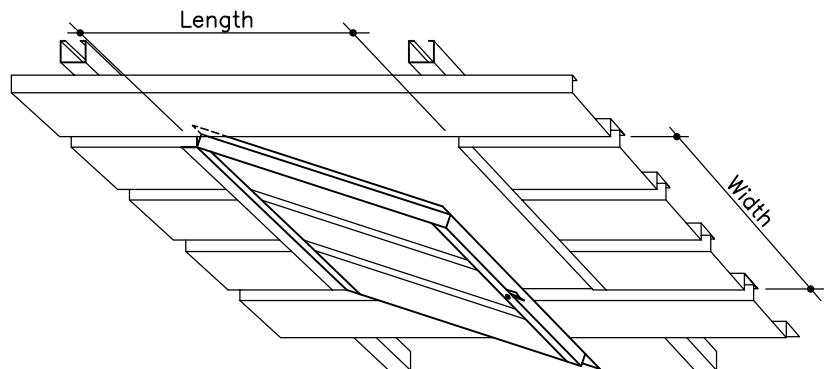

THEORETICAL NEED OF SUSPENSION STRUCTURES

Product	Need of material
Carrier No. 43A	1.2 - 1.6 m/m ²
Carrier lock	1 pcs / carrier meter
L-list No. 50	0.8 - 1.4 m/m ²
Z-list No. 51B	0.8 - 1.4 m/m ²

WEIGHT OF PANELS KG / M²

	UP-150	
Material	0.5 Al	0.7 Al
Weight	1.80	2.52

WEIGHT OF OTHER CEILING MATERIALS

Product	Weight of material
Mineral wool in plastic	0.52 kg/m ²
Carrier No. 43A	0.83 kg/m
Carrier lock	0.08 kg/pcs
L-list No. 50 (1.0 Al)	0.21 kg/m
Z-list No. 51B (1.0 Al)	0.15 kg/m

Latest information: www.lautex.com

All products are subject to modifications without prior notice 2011